

FEED EQUIPMENT

HAMMERMILL

A reliable, low-maintenance mill is an integral part of any feed production system, and simplicity is the hallmark of our hammermill's design. Varying screen size attains proper particle size, and varying motor horsepower ensures that this mill fits the job.

Sudenga[®]

INDUSTRIES, INC.

LIBERATOR III




- Economical, dependable solution to your grinding requirements in a small footprint
- Simplicity is the hallmark of this hammermill's design
- 6" x 18" diameter full circle grinding chamber (15.2 x 45.7 cm)
- Direct drive hub assembly with 15 hammers (optional 30 hammers)
 - 7½ to 30 HP motors

Learn more
or get a quote



1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
sales@sudenga.com | www.sudenga.com

FEED EQUIPMENT HAMMERMILL

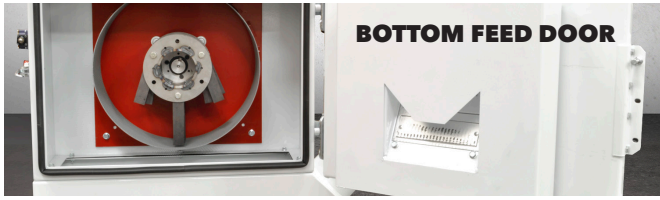

BOTTOM FEED DOOR

Feed inlets are 4" (10.2 cm) or 6" (15.2 cm) diameter.



CENTER FEED DOOR

Center feed doors provide longer hammer life and more uniform particle size.


DRY CORN CAPACITIES - lb./hour (kg/hour)

Screen Size	7½ HP	10 HP	20 HP	30 HP
1/8" (3.2 mm)	3,750 (1,705 kg)	5,000 (1,705 kg)	10,000 (4,545 kg)	14,000 (6,365 kg)
5/32" (4 mm)	4,500 (2,045 kg)	6,000 (2,725 kg)	12,000 (5,455 kg)	17,000 (7,725 kg)
3/16" (4.8 mm)	5,250 (2,385 kg)	7,000 (3,180 kg)	14,000 (6,365 kg)	20,000 (9,090 kg)
7/32" (5.6 mm)	6,000 (2,725 kg)	8,000 (3,635 kg)	16,000 (7,275 kg)	22,000 (10,000 kg)
1/4" (6.4 mm)	6,750 (3,070 kg)	9,000 (4,090 kg)	18,000 (8,180 kg)	25,000 (11,365 kg)

DRY BARLEY CAPACITIES - lb./hour (kg/hour)

Screen Size	7½ HP	10 HP	20 HP	30 HP
1/8" (3.2 mm)	1,650 (750 kg)	2,200 (1,000 kg)	4,400 (2,000 kg)	6,600 (3,000 kg)
5/32" (4 mm)	1,950 (885 kg)	2,600 (1,180 kg)	5,200 (2,365 kg)	7,800 (3,545 kg)
3/16" (4.8 mm)	2,325 (1,060 kg)	3,100 (1,410 kg)	6,200 (2,820 kg)	9,300 (4,227 kg)

SPECIFICATIONS Sudenga's hammermills are available in four different configurations.

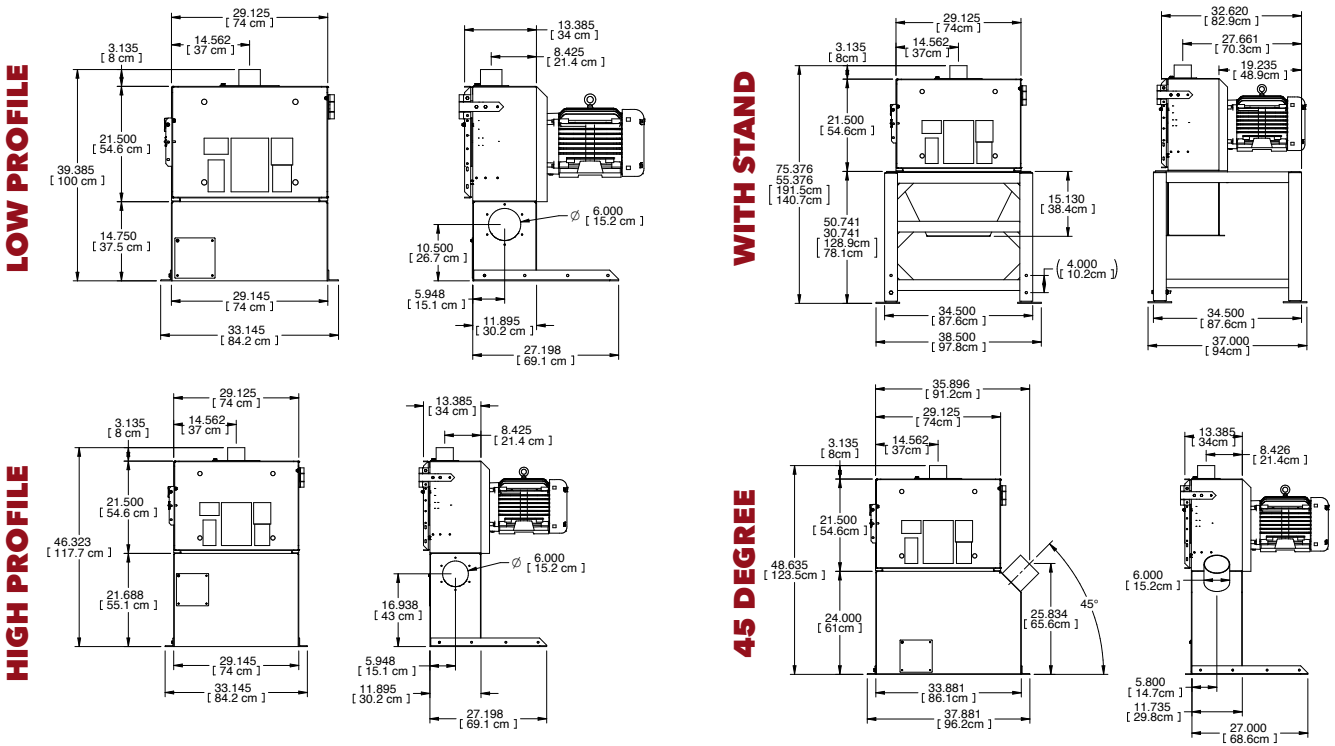

1-888-SUDENGA | 1-712-475-3301 | Fax: 1-712-475-3320
 PO Box 8, 2002 Kingbird Ave., George, IA 51237 USA
 sales@sudenga.com | www.sudenga.com

